General

Productaroup LF PowerTwo Pressfit Techn Mounting type

Material Brass lead-free (max. 0.1% Pb)

Surface

Customs tariff number

Country of origin Federal Republic of Germany Weight per piecs ~

0.003950 ka

Technical data

Terminal / Type Bolt / Metric Thread/Diameter x Length 4.000 mm x 6.00 mm

1.20 Nm Torque

Pressure plate length x width 10.000 mm x 10.00 mm

Pressure plate height 2.00 mm Height total 14.40 mm Pin length 6.40 mm Pin alignment knurl Push in area for diameter 6.20 mm

3.50 mm up to 6.40 mm Push in length

Processing Notice

Usage and storage

Temperature -40° C up to $+150^{\circ}$ C

Storage dry environment protected from weather

conditions

Storage conditions at $+5^{\circ}$ C up to $+40^{\circ}$ C, 75% RH,

non-condensing

Packaging

packaging quantity 0.000 pcs


Accessories

Press in tool

Standard drill pattern

Drill hole specification for PCB

В

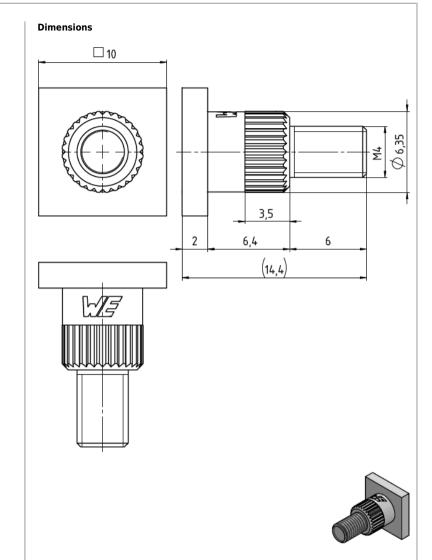



Würth Elektronik ICS GmbH & Co. KG Würthstraße1 74676 Niedernhall, Germany P +49 7940 9810-4444 If-powerelement@we-online.de

Observe protective note ISO 16016. Passing on or duplication without previous written agreement forbidden. Violations oblige to compensation. All rights reserved in the event of a patent or utility model protection. Subject to change without notice! Is NOT subject to change service!

Generaltolerances Projection mode **(** DIN ISO 2768-mH Revison Date All measures in

mm

08.06.21

Part no.

LF991204

Description

LF PowerTwo Push in Element Bolt

