General

Productaroup LF PowerTwo Pressfit Techn Mounting type

Brass lead-free (max. 0.1% Pb) Material

Surface

Customs tariff number

Country of origin Federal Republic of Germany

Weight per piecs ~ 0.005000 kg

Technical data

Terminal / Type Buchse Durchgang / Diameter Thread/Diameter x Length 8.200 mm x 8.40 mm

0.00 Nm Torque

Pressure plate length x width 16.000 mm x 16.00 mm

Pressure plate height 2.00 mm Height total 8.40 mm Pin length 6.40 mm Pin alignment knurl Push in area for diameter 10.50 mm

Push in length 3.50 mm up to 6.40 mm

Processing Notice

Usage and storage

Storage conditions

Temperature -40° C up to $+150^{\circ}$ C

Storage dry environment protected from weather

conditions

at $+5^{\circ}$ C up to $+40^{\circ}$ C, 75% RH,

non-condensing

Packaging

packaging quantity 0.000 pcs


Accessories

Press in tool

Standard drill pattern

Drill hole specification for PCB

Α

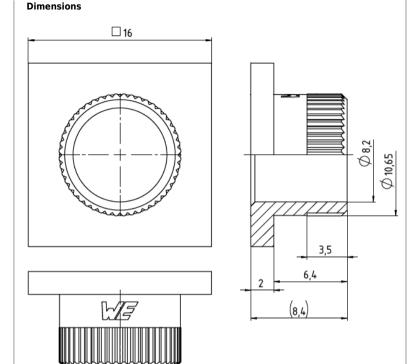







Würth Elektronik ICS GmbH & Co. KG Würthstraße1 74676 Niedernhall, Germany P +49 7940 9810-4444 If-powerelement@we-online.de

Observe protective note ISO 16016. Passing on or duplication without previous written agreement forbidden. Violations oblige to compensation. All rights reserved in the event of a patent or utility model protection. Subject to change without notice! Is NOT subject to change service!

Generaltolerances Projection mode **(** DIN ISO 2768-mH Revison Date All measures in

mm

08.06.21

Part no.

LF990482

Description

LF PowerTwo Push in Element Bush

